


IPC-DVJ30 Series



Features

- ◆ Vandalproof IR Dome Camera
- ◆ Support Color/BW mode converting (dual IR-Cut filter)
- ◆ Smart IR function, better quality in B/W mode
- ◆ H.264/MJEG is optional, dual streaming, low bandwidth, and high quality.
- ◆ Support anti-trembling
- ◆ Support 4 area privacy mask
- ◆ Support motion detection, network fault detection and alarm video, image snapping
- ◆ Built-in Web server enables the use of a standard Web browser for viewing and management.
- ◆ Support ONVIF protocol
- ◆ 36 pcs \varnothing 5mm IR-LED, IR Range 30M
- ◆ Built-in 2.8--12mm Manual zoom ICR Lens

Size Chart

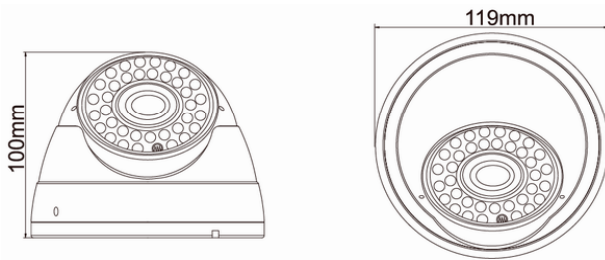

Specifications

Model Name		IPC-DVJ30-1.0E	IPC-DVJ30-1.3E
Image Sensor		1/4" OmniVision1.0MP CMOS Sensor	1/3" Aptina 1.3MP CMOS Sensor
CMOS Sensor		OV9712S	AR0130
DSP Device		Hi3518E	Hi3518E
Resolutions		720P(1280x720)	960P(1280x960)
Minimum Illuminations		0lux (IR LED ON)	
Lens Furnished		2.8--12mm Manual zoom ICR Lens	
Infrared Luminary		36 pieces \varnothing 5 mm IR-LED	
Illuminate Distance		30M	
Wavelength		850 nm	
Waterproofing Criterion		IP 66	
Video Compression		H.264Base line /Main Profile	
		MJPEG	
Resolution	Main stream	1280*720, 1-25(30) FPS	1280*960, 1-25(30) FPS 1280*720, 1-25(30) FPS
	Sub stream	720*480, 1-25(30) FPS	
		640*480, 1-25(30) FPS	
		320*240, 1-25(30) FPS	
Video Bit-rate		32Kbps~8Mbps, Supports CBR/VBR	
Quality		Five levels under VBR; Free adjustment under CBR	
storage		Network remote storage	
Remote Monitoring		IE Browsing、CMS remote control	
Online connection		Support simultaneous monitoring for upto 8 users; Support multi-stream real time transmission	
Network		RJ45	
Smart alarm		Motion Detection, E-mail alarm	
Protocols		TCP/IP, UDP, RTSP, DNS, DDNS, DHCP, FTP, NTP, SMTP, UPNP	
Interface Protocol		ONVIF、GB-T/28181-2011	
Working Temperature		-20°C ~ +55°C	
Working Humidity		0% - 90%	
Power		DC12V / POE (Option)	
Dimension		\varnothing 119 x100 mm	
Weight		900g	

Design and specifications are subject to change without notice.