





⑦

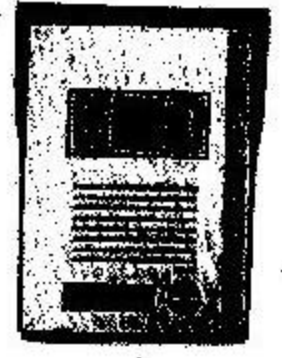

⑧

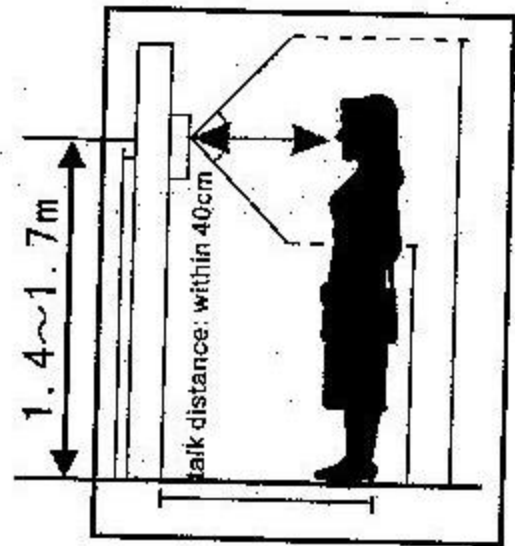

- ⑦、Cover the panel.
- ⑧、Fasten the screws on the bottom of the unit.

C. Wiring supplies.

It needs to work with 15m cable. If the user wants to lengthen the cable into 15m~50m, $6 \times 0.5 \text{mm}^2$ signal wire and $8 \times 0.5 \text{mm}^2$ signal wire must be used; for 50m~100m, $6 \times 0.75 \text{mm}^2$ signal wire and $8 \times 0.75 \text{mm}^2$ signal wire must be used. Connect the wiring terminals 1、2、3、4、5、6 of two outdoor units respectively with two groups of wiring terminals 1、2、3、4、5、6 on the left side of the junction box. Connect the terminals 1、2、3、4、5、6、7、8 of the indoor unit with the terminals 1、2、3、4、5、6、7、8 on the right side of the junction box. Connect electric locks A & B with the terminals 1、2 and 3、4, and $2 \times 1.0 \text{mm}^2$ connecting wire must be used for electric locks.

Wiring diagram

