



Wiring diagram

μπουτονιέρα/κάμερα
outdoor station
crl-3AV - 16AV

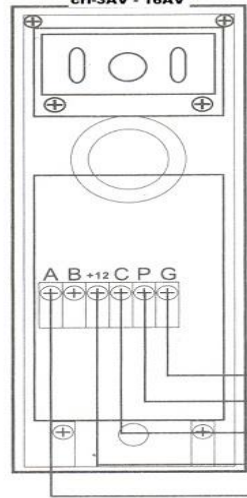


Τροφοδοτικό RL-PS
Power
PS

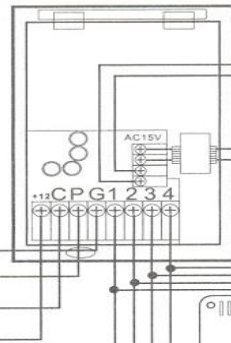

κυβρί πόρτας
Electric lock

ϕ 0.65mm²

AC Input:

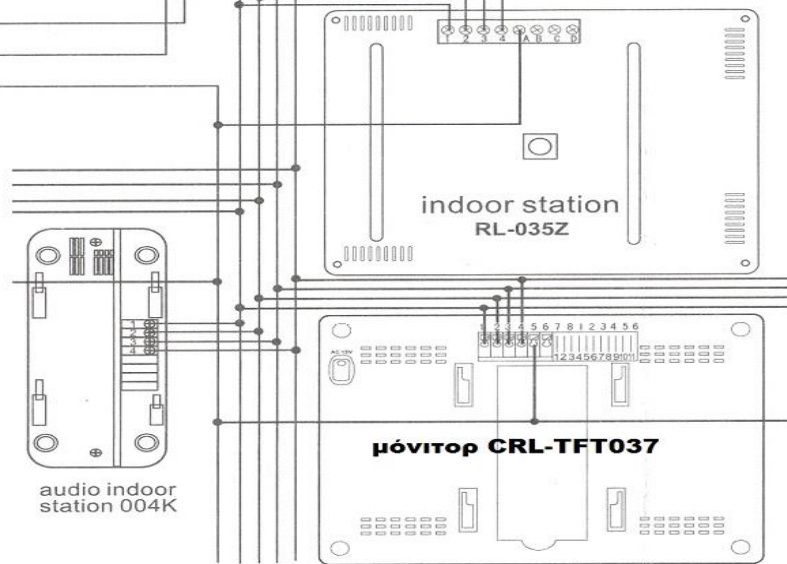

audio indoor station 004K

indoor station
RL-035Z

μόνιτορ CRL-TFT037

Other Video indoor station indoor station
RL-TFT037 (RL-TFT027 RL-TFT028 RL-TFT067)

μπουτονιέρα/κάμερα
outdoor station
crl-3AV - 16AV

Wiring instruction for outdoor station

supply line	+12V
C	signal line
G	earth wire
P	calling line
B	earth wire
A	video line

μόνιτορ CRL-TFT037

wiring instruction for indoor station

4	supply line
3	unlock
2	calling line
1	earth wire
B or 6	earth wire
A or 5	video line


Wiring instruction of connecting terminal A or 5 in Indoor station and connecting terminal B or 6:

If choice 75Ω video transmission line to connect outdoor station and video indoor station, A or 5 connect core wire and B or 6 connect screening wire.

If choice single-wire transmission line connect outdoor station and video indoor station, connecting terminal A in outdoor station connect A or 5 in video indoor station by a single wire (0.65mm²), connecting terminal B or 6 remain not be connected.

screening wire

core wire



75 Ω